

Rifle adjustable stocks guide

AR9 - AR10 - AR15 - M4 - M16 Compatible



Code	Maximum lenght	Stock weight	Description
CR9AR15	295 mm - 11,61 in	708 g - 24,97 oz	Toni System buffer and spring included
CR11AR15	325 mm - 12,79 in	745 g - 26,27 oz	Toni System buffer, spring and rubber buffer included

Additional info: Buffer & spring (203,5 g - 7,17 oz) / Rubber buffer (19,4 g - 0,68 oz)



CR9AR15




CR11AR15


Warnings. Toni System reserves the right to make any changes it deems necessary for the improvement of the products displayed, without prior notice. Handle with care, open carefully. Assembly of this product may require specialized personnel with suitable equipment. Do not modify or tamper the parts. If you encounter difficulties in assembly, contact the company.

Instructions


1. Disassemble the stock like the “fig.A”

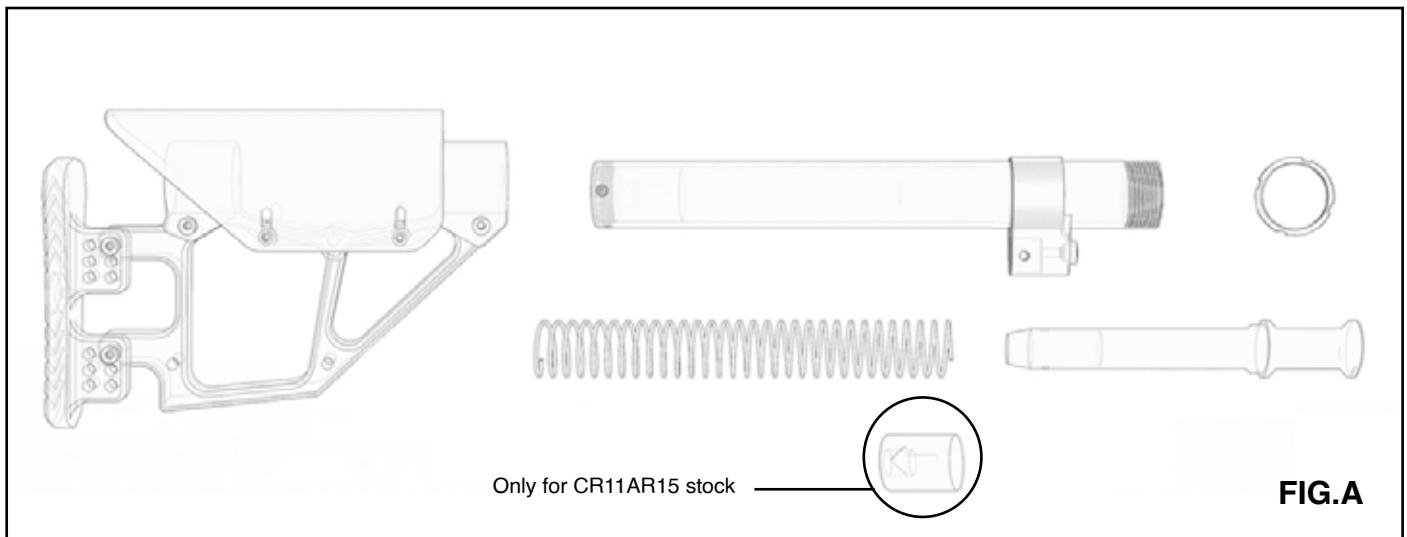


2. Put the medium strength threadlocker on the bushing thread (component A), than lock it (fig.B)

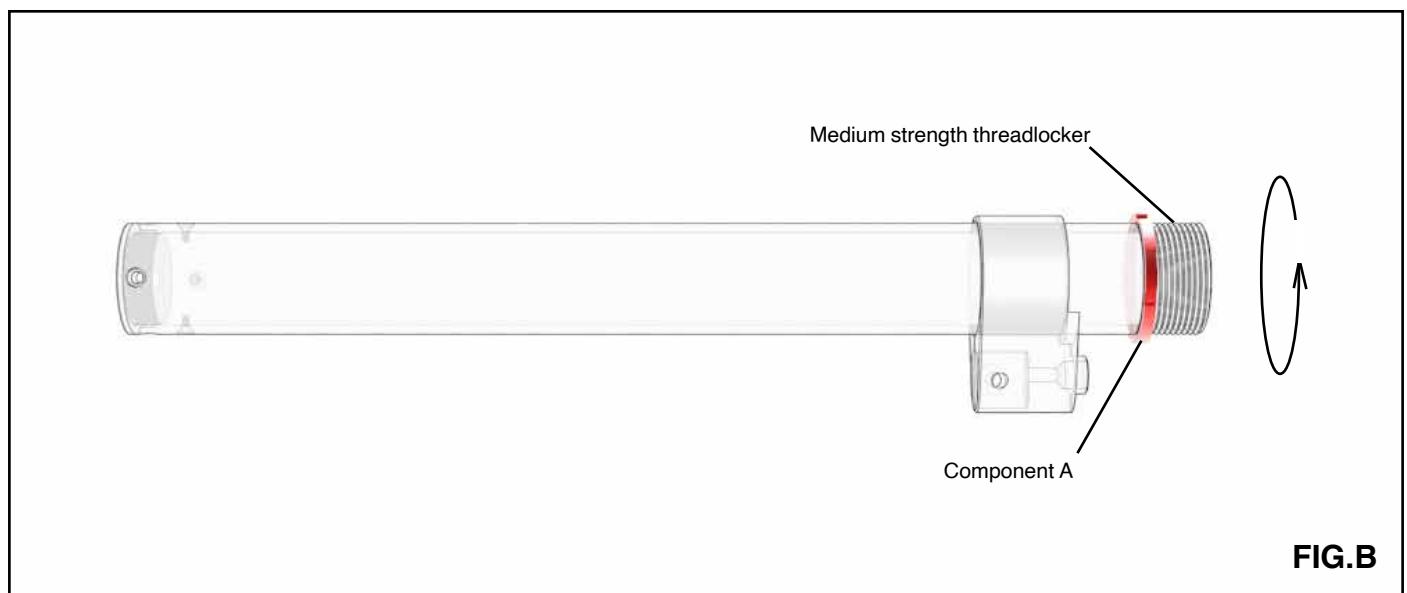


3. Screw the stock into the lower receiver, be careful to low the spring guide stop pin (fig. C).

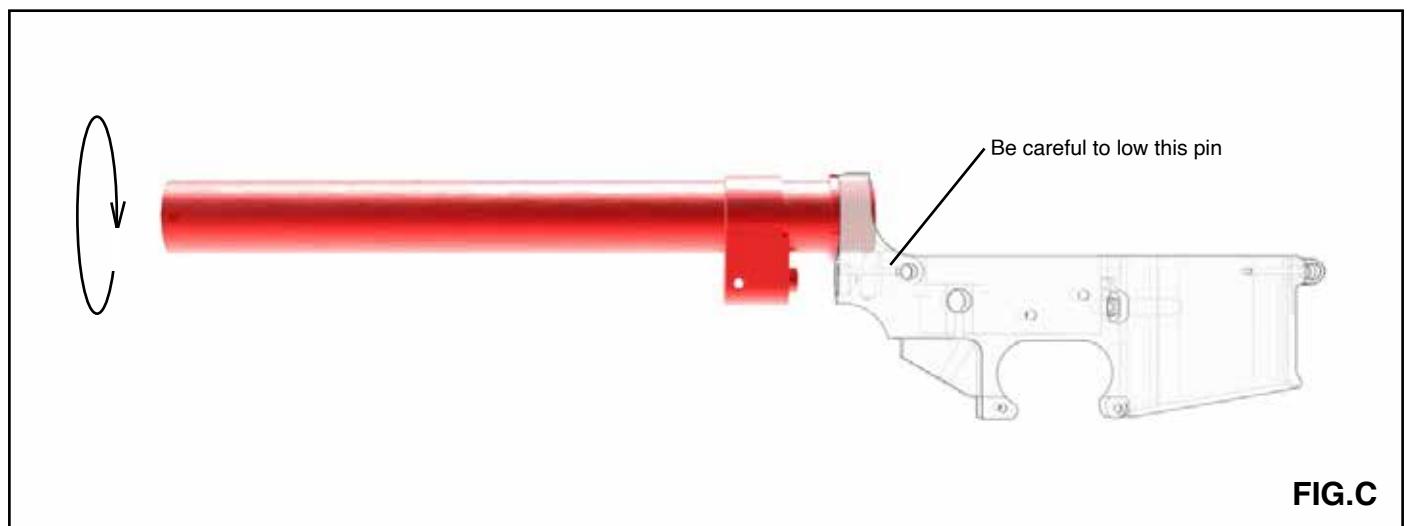

4. Put the component B in position, and than lock the screws S2. After that, place the component C in position, be careful with the small spring into the lower receiver, than lock the screw S4

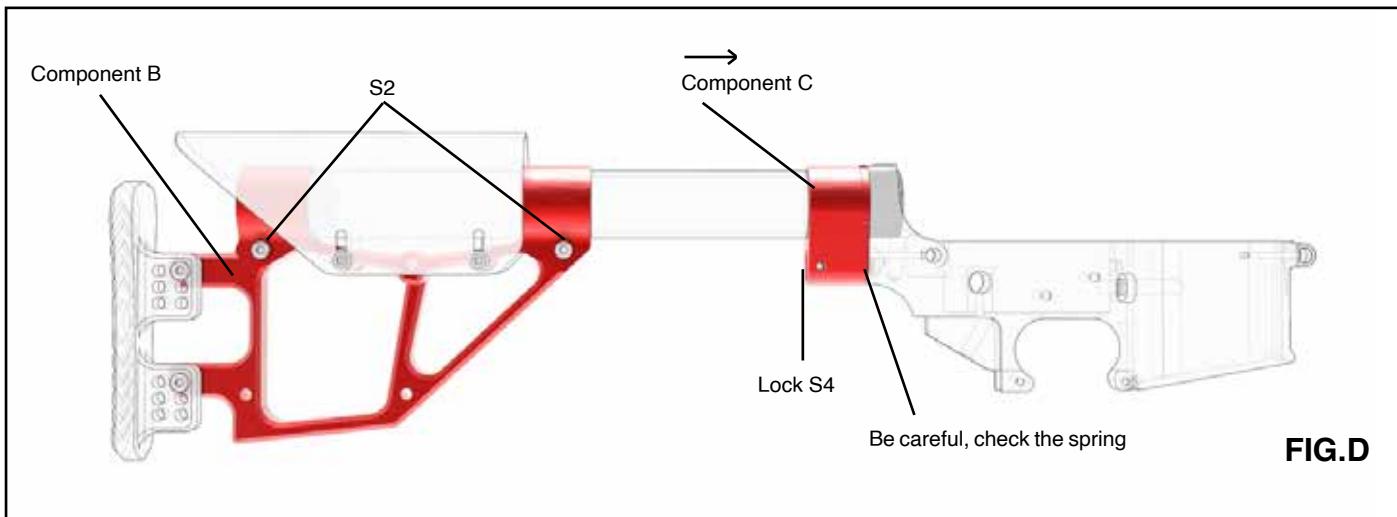

5. Insert the spring and the buffer like "fig.E". Only for the CR11AR15 stock it is necessary to put the furnished rubber buffer before the spring.

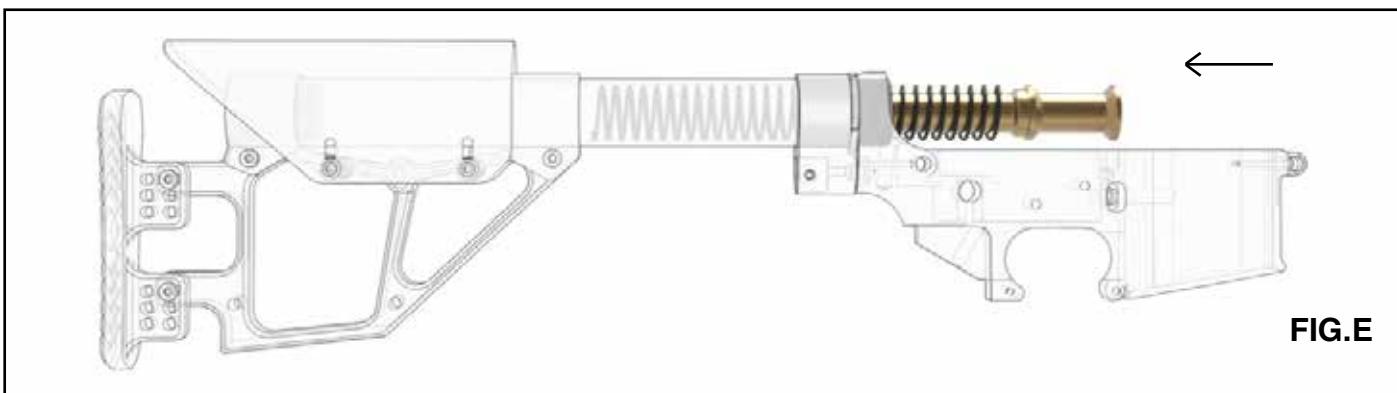

Settings

